



MS 15-100/T white-EN54

- Distinctive design
- Excellent sound
- IP 65



EN 54-24:2008

Ref. Nr.: 011-13

ID-Code: SAA-LS11
1438-CPR-0998

ic audio GmbH, Boehringerstraße 14a,
D-68307 Mannheim, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The compact monitor speaker impresses with its sophisticated design and its powerful sound. Perfectly suitable for installations where high sound quality is needed.

The 15W powered speaker is equipped with a high-quality 2-way system and a 100V transformer with 3 power adjustments. Low-impedance operation with 8 ohms is possible. The impact-resistant, UV-resistant ABS plastic housing in RAL 9016 assures enduring stability. For additional reliability, a wetness impregnation of the speaker is provided.

The speaker is also secured with protection class IP 65 against the risks of environmental influences. A comfortable connection of the speaker is made possible by a stable screw terminal with contact protection. Quick and easy mounting with wall mounting bracket.

Technical Data (Electrical)

Description	MS 15-100/T white-EN54
Power	15/7,5/3,75/1,8 (8ohm) W
Impedance (100V)	667/1333/2667/5000 ohm
Frequency Range	67 - 21.000 Hz
Frequency Response	55 - 24.000 Hz
SPL IEC268-5, 1W/1m	80,2 dB
SPL EN54-24, Pmax/4m	81,0 dB
Sensitivity EN54-24, 1W/4m	68,2 dB
Sensitivity EN54-24, 1W/1m	80,2 dB
Dispersion -6dB, 500Hz	360° (h) 360° (v)
Dispersion -6dB, 1KHz	220° (h) s/d 190° (v) s/d
Dispersion -6dB, 2KHz	135° (h) 130° (v)
Dispersion -6dB, 4KHz	150° (h) 165° (v)

Technical Data (Mechanical)

Dimensions	210x130x120 mm
IP Rating	IP65
Weight (net)	2,0 kg
Temperature Range	-25 / +70 °C
Mounting	Swivel bracket
Horizontal Adjustment	-70°...70° (10° steps)
Vertical Adjustment	-50°...50° (10° steps)
Connector	6-pin screw terminal
Terminal Diameter	2,5 mm
Maximum Cable Passage	4,9mm ²
Colour	RAL 9016



Product Attributes




Technical Drawing



MS 15-100/T-EN54

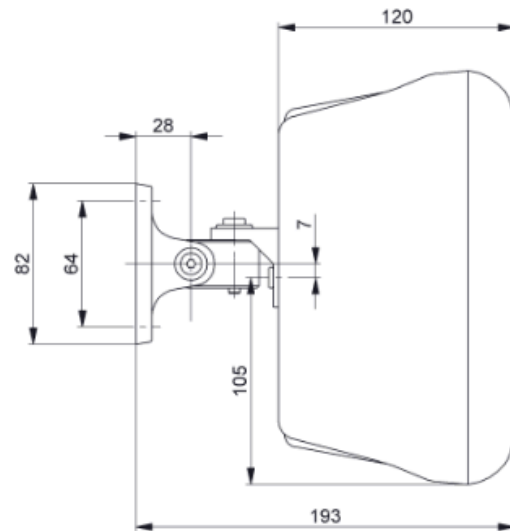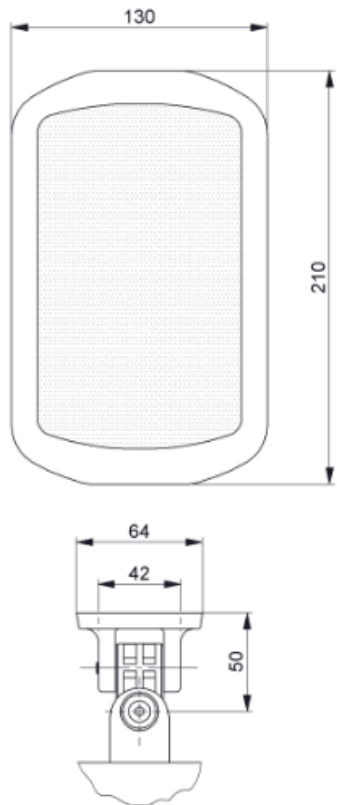

Horizontal plane
in steps of 10°





Vertical plane
in steps of 10°

all dimensions are in mm


Frequency Response Diagram

Sensitivity

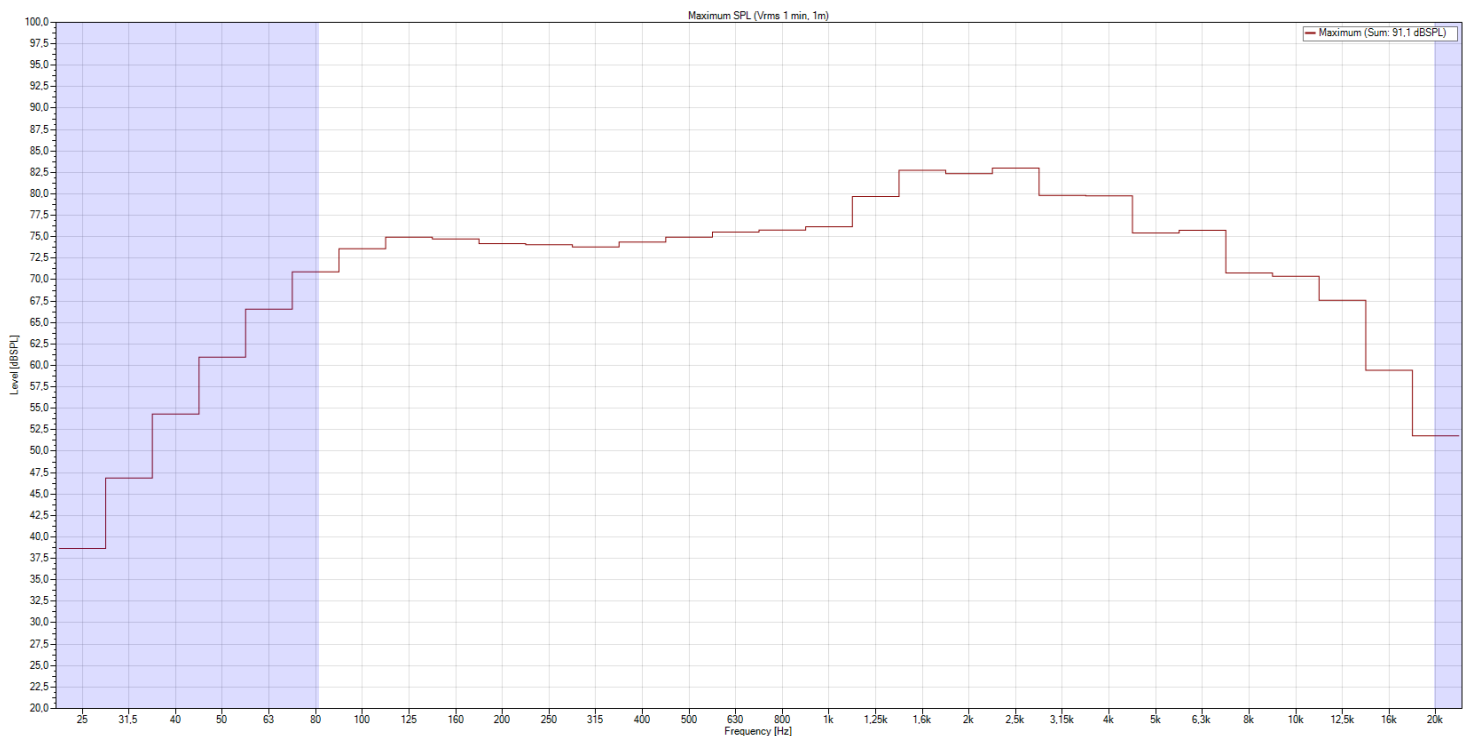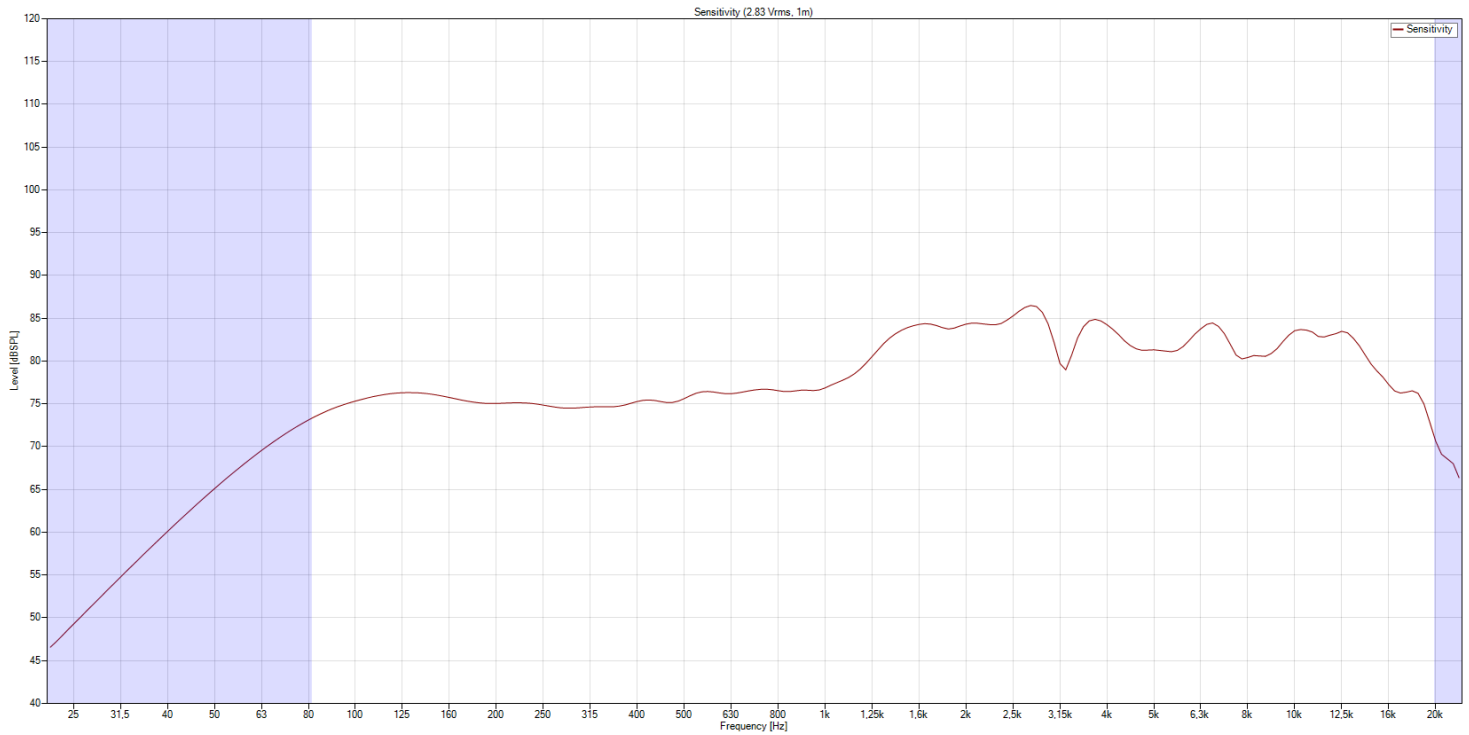


Isobar

Vertical

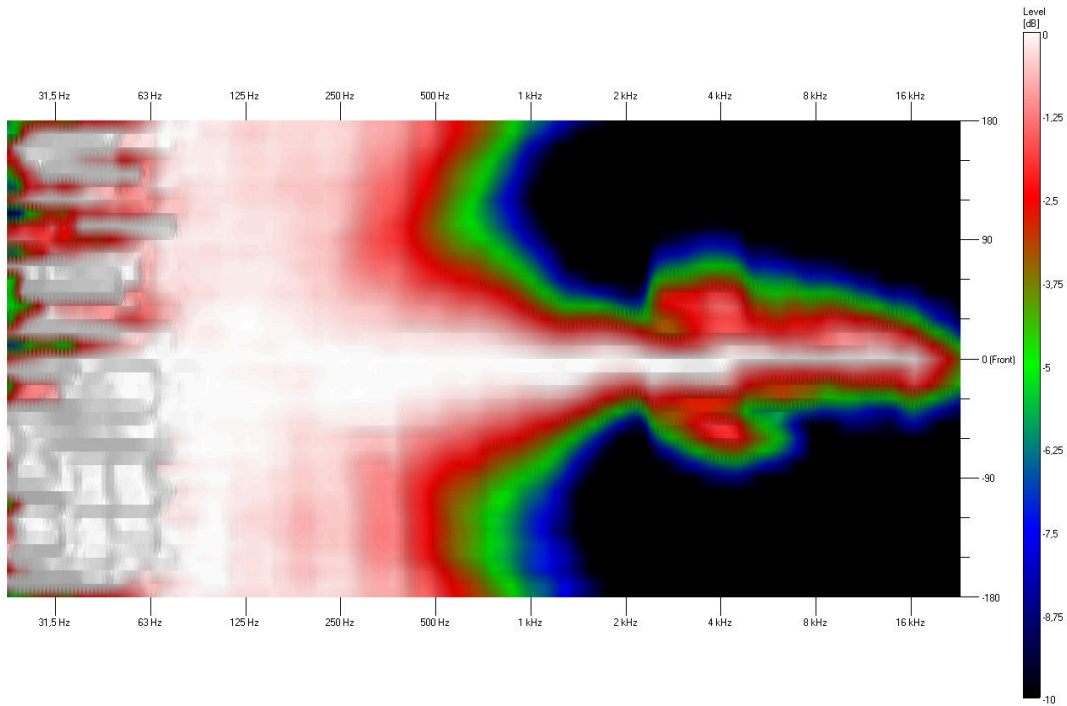


Horizontal

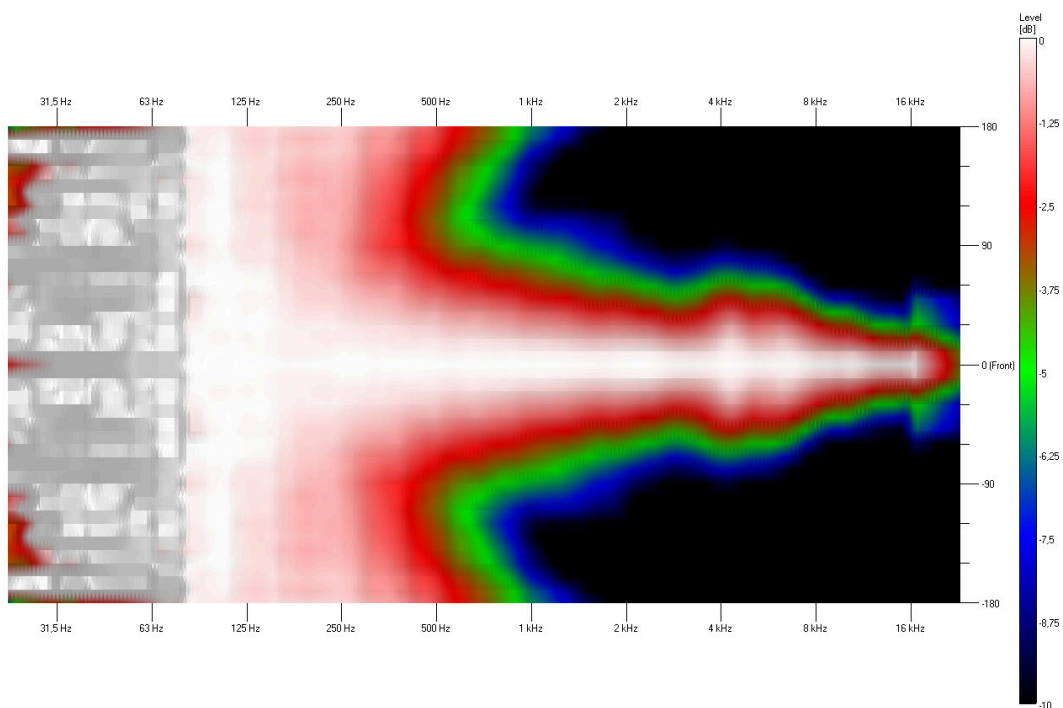


Polar Diagram


Polar Diagram 500Hz

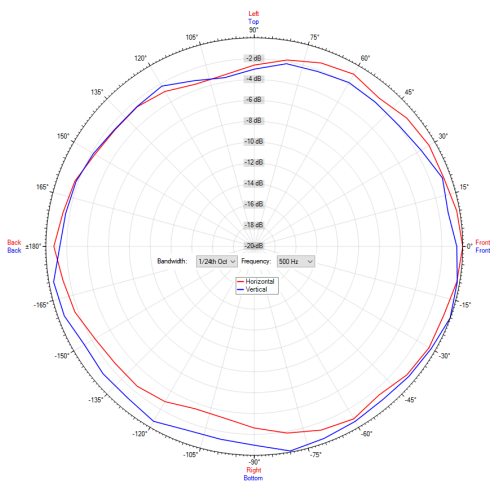


Polar Diagram 4000Hz

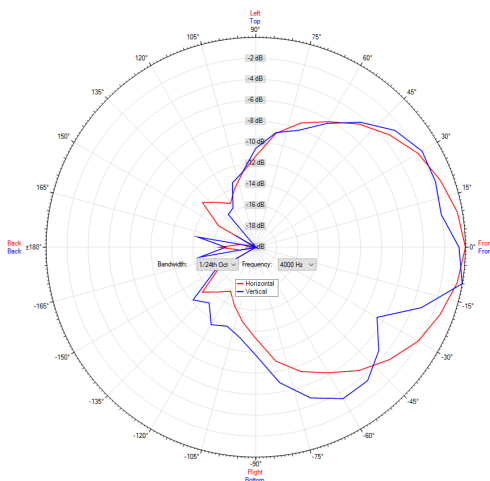


Polar Diagram 1000Hz

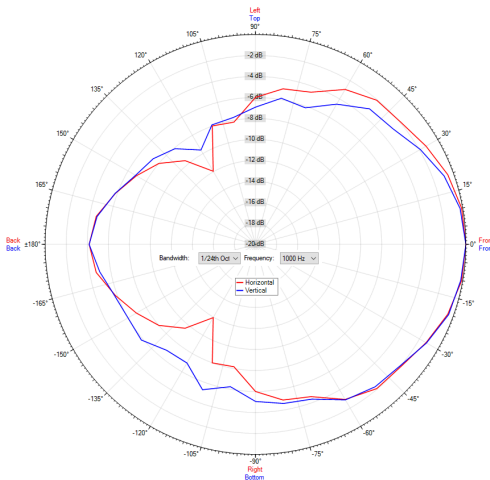

Polar Diagram 8000Hz

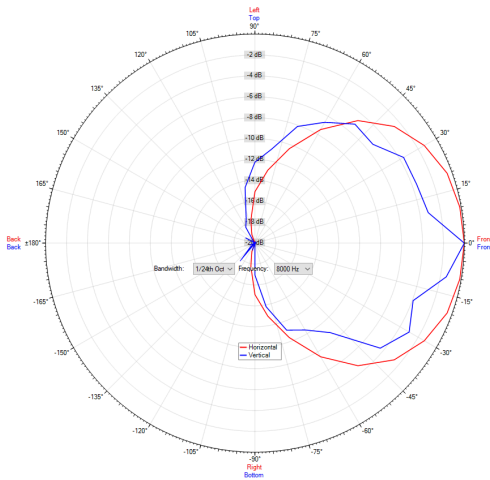

Polar Diagram 2000Hz

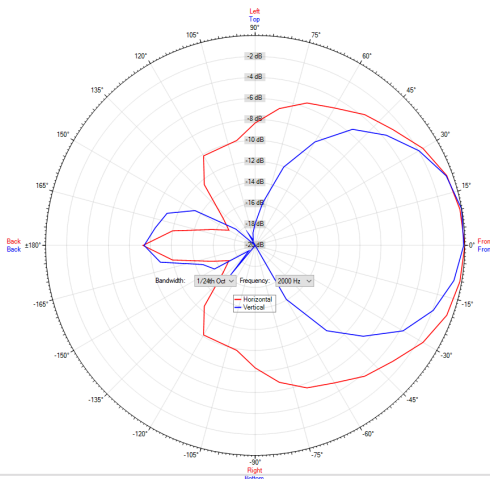

ic audio loudspeakers are tested and classified according to the IEC standard 60529 (degree of protection by enclosure) against the penetration of foreign objects and moisture. The classification is conforming to standards through characterization with a fixed code. This code consists of the letters IP (International Protection) followed by two digits. The first digit indicates the degree of protection against dust and the second digit the degree of protection against water. Please note that the testing of the products has been carried out in laboratory conditions which are not always 100% comparable with the conditions of different installation environments. This protection can be reduced due to normal wear and tear depending on the installation environment.

RoHS compliant (2011/65/EU)

The IP rating specified is based on ic audio test results, not on CNBOP-PIB test results. Certification only verifies the minimum requirements for EN54-24 compliance.



Article Nr.: 20122643
Packing Unit: 8

